

【パッケージ / Package : USP-6C】

シリーズ名 Series Name	製品質量 (mg) Product Mass (mg)	MSL	リフロー Reflow ※	フロー Flow	手はんだ Manual ※
XC25BS7	6	1	可 available	不可 not available	可 available
XC25BS8					
XC6101					
XC6102					
XC6103					
XC6104					
XC6105					
XC6111					
XC6112					
XC6113					
XC6114					
XC6115					
XC6116					
XC6117					
XC6121					
XC6122					
XC6123					
XC6124					
XC6132					
XC6133					
XC6134					
XC6207					
XC6216					
XC6220					
XC6222					
XC6227					
XC6230					
XC6365					
XC6366					
XC6401					
XC6408					
XC6415					
XC6416					
XC6419					
XC6421					
XC6505					
XC6601					
XC6602					
XC6603					
XC6604					
XC6701					
XC6702					
XC6801					
XC6802					

【パッケージ / Package : USP-6C】


シリーズ名 Series Name	製品質量 (mg) Product Mass (mg)	MSL	リフロー Reflow ※	フロー Flow	手はんだ Manual ※
XC6901	6	1	可 available	不可 not available	可 available
XC6902					
XC8107					
XC8108					
XC8109					
XC9110					
XC9111					
XC9119					
XC9120					
XC9121					
XC9122					
XC9141					
XC9142					
XC9220					
XC9221					
XC9235					
XC9236					
XC9237					
XC9246					
XC9247					
XC9257					
XC9258					
XC9260					
XC9261					
XC9263					
XC9264					
XC9267					
XC9268					
XD6132					
XD6133					
XD9260					
XD9261					
XD9263					
XD9264					
XD9267					
XD9268					

【パッケージ / Package : USP-6C】

※ はんだ付け条件 (以下の条件の範囲内でご使用下さい)

Soldering Conditions (please use within the following conditions.)

1) リフローはんだ(3回) / Reflow Soldering Temperature Profile (three times)

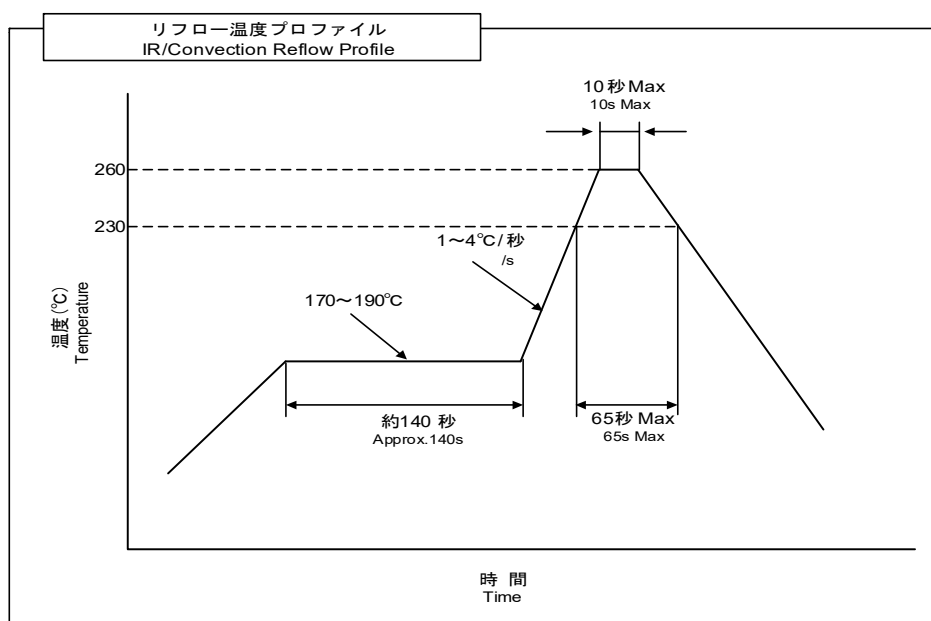

2) 手はんだ(2回) / Manual Soldering (twice)

こて先温度 400°C以下 時間 3秒以内 / Bit Temperature: Under 400°C Time: Under 3s