

*Torex...Powerfully Small!*



**Discrete**  
**(MOSFET/Diode/SiC Diode/TVS)**  
**Product Overview**

January 2026  
TOREX Semiconductor Ltd.  
Rev. 2.0

## ■ XBSC41A066CS-G / XBSC42A086CS-G / XBSC43A106CS-G - 650V/6A, 8A, 10A SiC Schottky Barrier Diode

- Repetitive peak reverse voltage  $V_{RM}=650V$
- Fast switching operation / Low recovery loss

|              |               |
|--------------|---------------|
| $V_{RM}$     | : 650V        |
| $V_R$        | : 650V        |
| $I_{F(AVE)}$ | : 6A, 8A, 10A |
| $V_F$        | : 1.35V       |
| Package      | : TO-220AC    |
| $T_{jmax}$   | : 175°C       |


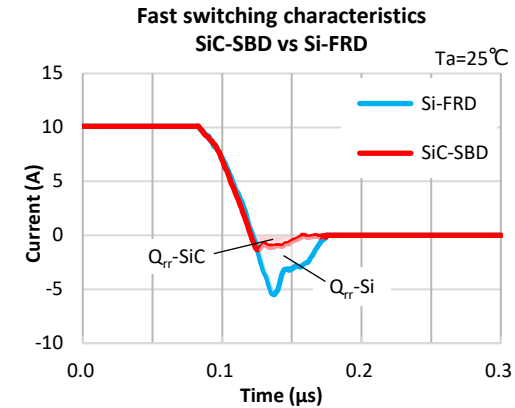
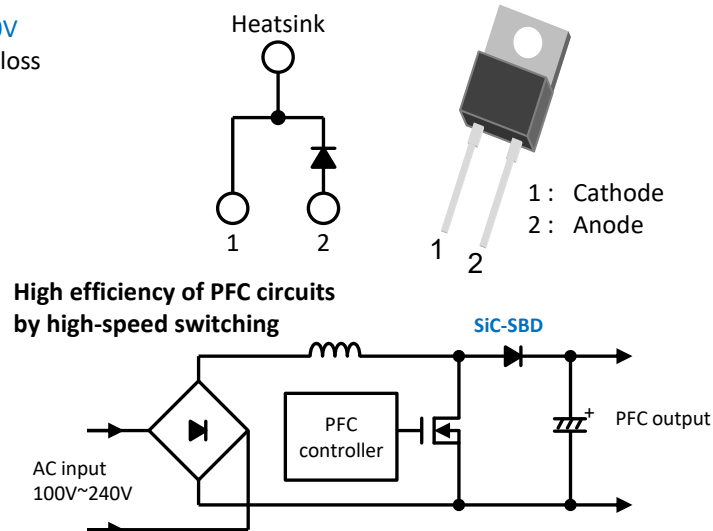


UNDER DEVELOPMENT

## ■ XPJ102N09N8R-G / XPJ101N04N8R-G - N-channel MOSFET 100V, 9.4mΩ/4.4mΩ, 59A/122A

- 100V operation N-ch MOSFET, mounted in small DFN5060 package
- Low loss due to low on-resistance and reduced charge capacitance

|              |                                               |
|--------------|-----------------------------------------------|
| $V_{DS}$     | : 100V                                        |
| $V_{GS}$     | : $\pm 20V$                                   |
| $I_D$        | : 59A/122A                                    |
| $V_{GS(th)}$ | : 2.8V                                        |
| $R_{DS(on)}$ | : 9.4mΩ/4.4mΩ (MAX)                           |
| $I_{DSS}$    | : 1μA ( $V_{DS}=100V, V_{GS}=0V$ )            |
| $I_{GSS}$    | : $\pm 100nA$ ( $V_{GS}=\pm 20V, V_{DS}=0V$ ) |
| $Q_{gs}$     | : 7.6nC/15.0nC                                |
| $Q_{gd}$     | : 3.0nC/6.0nC                                 |
| $Q_g$        | : 19.0nC/40.5nC                               |
| Package      | : DFN5060-8L (5.0 x 6.0 x 1.1mm)              |
| $T_{jmax}$   | : 150°C                                       |

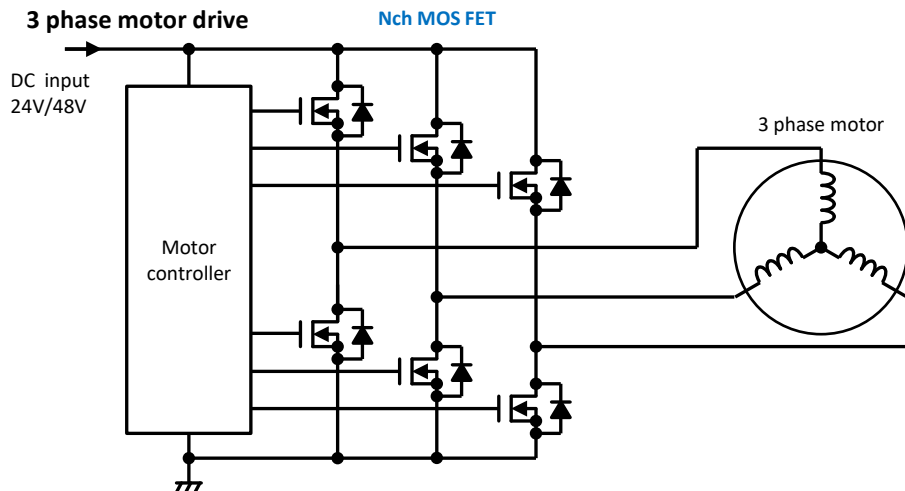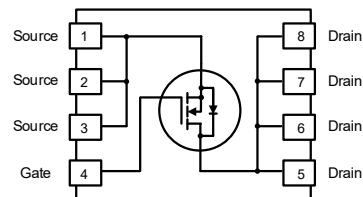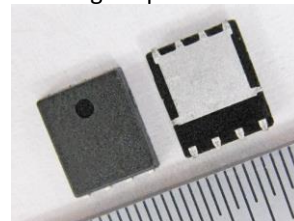

## Nchannel Single MOSFET

| Product        | Package                       | V <sub>DSS</sub><br>[V]           | V <sub>GSS</sub><br>[V] | I <sub>D</sub><br>[A]     | R <sub>DS(on)</sub> (Max.) [Ω] |                       |                       |                      | Ciss<br>[pF] |     |     |     |
|----------------|-------------------------------|-----------------------------------|-------------------------|---------------------------|--------------------------------|-----------------------|-----------------------|----------------------|--------------|-----|-----|-----|
|                |                               |                                   |                         |                           | V <sub>GS</sub> =1.5V          | V <sub>GS</sub> =2.5V | V <sub>GS</sub> =4.5V | V <sub>GS</sub> =10V |              |     |     |     |
| XP222N03017R-G | SOT-723<br>(8,000pcs/Reel)    | 20                                | ±8                      | 0.3                       | -                              | 1.8                   | 1.3                   | -                    | 18           |     |     |     |
| XP231N02017R-G |                               | 30                                | ±20                     | 0.2                       | -                              | 11                    | 5                     | -                    | 6.5          |     |     |     |
| XP232N03017R-G |                               | -                                 | -                       | 0.3                       | -                              | -                     | 2.5                   | 2                    | 22           |     |     |     |
| XP261N70027R-G |                               | 60                                | ±20                     | 0.15                      | -                              | -                     | 5.5                   | 5                    | 18           |     |     |     |
| XP222N03015R-G | SOT-523<br>(3,000pcs/Reel)    | 20                                | ±8                      | 0.3                       | -                              | 1.8                   | 1.3                   | -                    | 18           |     |     |     |
| XP231N02015R-G |                               | 30                                | ±20                     | 0.2                       | -                              | 11                    | 5                     | -                    | 6.5          |     |     |     |
| XP232N03015R-G |                               | -                                 | -                       | 0.3                       | -                              | -                     | 2.5                   | 2                    | 22           |     |     |     |
| XP261N70025R-G |                               | 60                                | ±20                     | 0.15                      | -                              | -                     | 5.5                   | 5                    | 18           |     |     |     |
| XP222N03013R-G | SOT-323-3A<br>(3,000pcs/Reel) | 20                                | ±8                      | 0.3                       | -                              | 1.8                   | 1.3                   | -                    | 18           |     |     |     |
| XP224N06013R-G |                               |                                   |                         | 0.6                       | -                              | 0.85                  | 0.7                   | -                    | 60           |     |     |     |
| XP223N10013R-G |                               |                                   |                         | 1.0                       | 10                             | 0.35                  | 0.3                   | -                    | 99           |     |     |     |
| XP231N02013R-G |                               |                                   |                         | 0.2                       | -                              | 11                    | 5                     | -                    | 6.5          |     |     |     |
| XP232N03013R-G |                               | 30                                | ±20                     | 0.3                       | -                              | -                     | 2.5                   | 2                    | 22           |     |     |     |
| XP233N05013R-G |                               |                                   |                         | 0.5                       | -                              | 4                     | 1.5                   | -                    | 40           |     |     |     |
| XP234N08013R-G |                               |                                   |                         | 0.8                       | -                              | -                     | 0.4                   | 0.29                 | 64           |     |     |     |
| XP261N70023R-G |                               |                                   |                         | 0.15                      | -                              | -                     | 5.5                   | 5                    | 18           |     |     |     |
| XP262N70023R-G |                               | 60                                | ±20                     | 0.3                       | -                              | -                     | 2.1                   | 1.6                  | 30           |     |     |     |
| XP222N03011R-G |                               | SOT-23(TO-236)<br>(3,000pcs/Reel) | 20                      | ±8                        | 0.3                            | -                     | 1.8                   | 1.3                  | -            | 18  |     |     |
| XP224N06011R-G | 0.6                           |                                   |                         |                           | -                              | 0.85                  | 0.7                   | -                    | 60           |     |     |     |
| XP223N10011R-G | 1.0                           |                                   |                         |                           | 10                             | 0.35                  | 0.3                   | -                    | 99           |     |     |     |
| XP225N20011R-G | 2.0                           |                                   |                         |                           | -                              | 0.13                  | 0.1                   | -                    | 280          |     |     |     |
| XP231N02011R-G | 0.2                           |                                   |                         |                           | -                              | 11                    | 5                     | -                    | 6.5          |     |     |     |
| XP232N03011R-G | 0.3                           |                                   |                         |                           | -                              | -                     | 2.5                   | 2                    | 22           |     |     |     |
| XP233N05011R-G | 0.5                           |                                   |                         |                           | -                              | 4                     | 1.5                   | -                    | 40           |     |     |     |
| XP234N08011R-G | 0.8                           |                                   |                         |                           | -                              | -                     | 0.4                   | 0.29                 | 64           |     |     |     |
| XP235N20011R-G | 30                            |                                   | ±20                     | 2.0                       | -                              | -                     | 0.14                  | 0.11                 | 220          |     |     |     |
| XP236N20011R-G |                               |                                   |                         | 2.0                       | -                              | 0.14                  | 0.11                  | -                    | 230          |     |     |     |
| XP261N70021R-G |                               |                                   |                         | 0.15                      | -                              | -                     | 5.5                   | 5                    | 18           |     |     |     |
| XP262N70021R-G |                               |                                   |                         | 0.3                       | -                              | -                     | 2.1                   | 1.6                  | 30           |     |     |     |
| XP264N03011R-G | 60                            |                                   | ±20                     | 0.3                       | -                              | -                     | 2.1                   | 1.6                  | 30           |     |     |     |
| XP263N10011R-G |                               |                                   |                         | 1.0                       | -                              | -                     | 0.33                  | 0.25                 | 180          |     |     |     |
| XP151A13A0MR-G |                               |                                   |                         | SOT-23<br>(3,000pcs/Reel) | 20                             | ±8                    | 1.0                   | 0.25                 | 0.14         | 0.1 | -   | 220 |
| XP151A12A2MR-G |                               |                                   |                         |                           | ±12                            | 1.0                   | -                     | 0.16                 | 0.1          | -   | 180 |     |
| XP151A11B0MR-G | 30                            | ±20                               | 1.0                     |                           | -                              | -                     | 0.17                  | 0.12                 | 150          |     |     |     |
| XP161A1265PR-G | SOT-89<br>(1,000pcs/Reel)     | 20                                | ±12                     | 4.0                       | -                              | 0.095                 | 0.055                 | -                    | 320          |     |     |     |
| XP161A1355PR-G |                               | ±8                                | 4.0                     | 0.15                      | 0.07                           | 0.05                  | -                     | 390                  |              |     |     |     |
| XP161A11A1PR-G |                               | 30                                | ±20                     | 4.0                       | -                              | -                     | 0.105                 | 0.065                | 270          |     |     |     |

## Nchannel Single MOSFET : 10A or more

| Product        | Package                        | V <sub>DS</sub><br>[V] | V <sub>GS</sub><br>[V] | I <sub>D</sub><br>[A] | R <sub>DS(on)</sub> (Max.) |                       |                       |                      | Ciss<br>[pF] |
|----------------|--------------------------------|------------------------|------------------------|-----------------------|----------------------------|-----------------------|-----------------------|----------------------|--------------|
|                |                                |                        |                        |                       | V <sub>GS</sub> =1.5V      | V <sub>GS</sub> =2.5V | V <sub>GS</sub> =6.0V | V <sub>GS</sub> =10V |              |
| XPJ102N09N8R-G | DFN5060-8L<br>(6,000pcs/2Reel) | 100                    | ±20                    | 59                    | -                          | -                     | 14.3mΩ                | 9.4Ω                 | 1370         |
| XPJ101N04N8R-G |                                | 100                    | ±20                    | 122                   | -                          | -                     | 6.5Ω                  | 4.4Ω                 | 3010         |


## P-Channel Single MOSFET

| Product        | Package                           | V <sub>DS</sub><br>[V] | V <sub>GS</sub><br>[V] | I <sub>D</sub><br>[A] | R <sub>DS(on)</sub> (Max.) [Ω] |                        |                        |                       | Ciss<br>[pF] |
|----------------|-----------------------------------|------------------------|------------------------|-----------------------|--------------------------------|------------------------|------------------------|-----------------------|--------------|
|                |                                   |                        |                        |                       | V <sub>GS</sub> =-1.5V         | V <sub>GS</sub> =-2.5V | V <sub>GS</sub> =-4.5V | V <sub>GS</sub> =-10V |              |
| XP231P02017R-G | SOT-723<br>(8,000pcs/Reel)        | -30                    | ±8                     | -0.2                  | -                              | 8                      | 5                      | -                     | 34           |
| XP231P02015R-G | SOT-523<br>(3,000pcs/Reel)        | -30                    | ±8                     | -0.2                  | -                              | 8                      | 5                      | -                     | 34           |
| XP221P05013R-G | SOT-323-3A<br>(3,000pcs/Reel)     | -20                    | ±8                     | -0.5                  | -                              | 1.9                    | 1.3                    | -                     | 60           |
| XP222P08013R-G |                                   | -                      | -                      | -0.8                  | -                              | 0.65                   | 0.56                   | -                     | 118          |
| XP231P02013R-G |                                   | -30                    | ±8                     | -0.2                  | -                              | 8                      | 5                      | -                     | 34           |
| XP232P05013R-G |                                   | -                      | -                      | -0.45                 | -                              | 2.15                   | 1.25                   | -                     | 56           |
| XP221P05011R-G | SOT-23(TO-236)<br>(3,000pcs/Reel) | -20                    | ±8                     | -0.5                  | -                              | 1.9                    | 1.3                    | -                     | 60           |
| XP222P08011R-G |                                   |                        |                        | -0.8                  | -                              | 0.65                   | 0.56                   | -                     | 118          |
| XP223P15011R-G |                                   |                        |                        | -1.5                  | -                              | 0.23                   | 0.17                   | -                     | 165          |
| XP231P02011R-G |                                   |                        |                        | -0.2                  | -                              | 8                      | 5                      | -                     | 34           |
| XP232P05011R-G |                                   | -30                    | ±8                     | -0.45                 | -                              | 2.15                   | 1.25                   | -                     | 56           |
| XP233P15011R-G |                                   |                        |                        | -1.5                  | -                              | -                      | 0.33                   | 0.19                  | 160          |
| XP152A12COMR-G | SOT-23<br>(3,000pcs/Reel)         | -20                    | ±12                    | -0.7                  | -                              | 0.5                    | 0.3                    | -                     | 180          |
| XP152A11E5MR-G |                                   | -30                    | ±20                    | -0.7                  | -                              | -                      | 0.45                   | 0.25                  | 160          |
| XP202A0003MR-G |                                   | -                      | -                      | -3.0                  | -                              | -                      | 0.095                  | 0.067                 | 435          |
| XP162A12A6PR-G | SOT-89<br>(1,000pcs/Reel)         | -20                    | ±12                    | -2.5                  | -                              | 0.3                    | 0.17                   | -                     | 310          |
| XP162A11C0PR-G |                                   | -30                    | ±20                    | -2.5                  | -                              | -                      | 0.28                   | 0.15                  | 280          |
| XP202A0003PR-G |                                   | -                      | -                      | -5.0                  | -                              | -                      | 0.1                    | 0.059                 | 450          |

## Package



### SOT-723

h=0.5 MAX.  
p=0.8




### SOT-523

h=0.9 MAX.  
p=1.0max





### SOT-323-3A

h=1.1 MAX.  
p=1.3





### SOT-23 (TO-236)

h=1.15 MAX.  
p=1.5





### SOT-23

h=1.3 MAX.  
p=1.9




### SOT-89

h=1.6 MAX.  
p=1.5



### DFN5060-8L

h=1.1 MAX.  
p=1.27



## Schottky Barrier Diodes

| Product      | Package                     | $V_F$ [V] | $I_F$ [A] | $V_R$ [V] | $I_R$ [mA] | $C_t$ [pF] |
|--------------|-----------------------------|-----------|-----------|-----------|------------|------------|
| XB5013P11R-G | SOD-923<br>(8,000pcs/Reel)  | 30        | 0.1       | 0.35      | 0.01       | 4          |
| XB5013S16R-G | SOD-723<br>(3,000pcs/Reel)  | 30        | 0.1       | 0.71      | 0.002      | 6          |
| XB5053V15R-G | SOD-523<br>(8,000pcs/Reel)  | 20        | 0.5       | 0.40      | 0.1        | 12         |
| XB5013S15R-G |                             | 30        | 0.1       | 0.71      | 0.002      | 6          |
| XB5024S15R-G | SOD-523P<br>(5,000pcs/Reel) | 40        | 0.2       | 0.53      | 0.002      | 5          |
| XB5023P11R-G |                             | 30        | 0.2       | 0.5       | 0.1        | 5          |
| XB5053V13R-G | SOD-323A<br>(3,000pcs/Reel) | 20        | 0.5       | 0.40      | 0.1        | 12         |
| XB5104S13R-G | SOD-323P<br>(5,000pcs/Reel) | 40        | 1.0       | 0.49      | 0.2        | 35         |
| XB5053P11R-G |                             | 20        | 0.5       | 0.49      | 0.1        | 15         |
| XB5104S14R-G | SOD-123A<br>(3,000pcs/Reel) | 40        | 1.0       | 0.49      | 0.2        | 35         |
| XB5104V14R-G |                             | 40        | 1.0       | 0.37      | 2          | 150        |
| XB5104P11R-G | SOD-123P<br>(3,000pcs/Reel) | 40        | 1.0       | 0.56      | 0.5        | 30         |
| XB5203V19R-G | SMA-XG<br>(2,000pcs/Reel)   | 30        | 2.0       | 0.35      | 3          | 280        |
| XB5303V19R-G |                             | 30        | 3.0       | 0.36      | 3          | 385        |
| XB5204S19R-G |                             | 40        | 2.0       | 0.49      | 0.2        | 180        |
| XB5204V19R-G |                             | 40        | 3.0       | 0.46      | 0.1        | 75         |
| XB5304S19R-G |                             | 40        | 3.0       | 0.47      | 0.3        | 180        |
| XB5206S19R-G |                             | 60        | 2.0       | 0.62      | 0.3        | 120        |
| XB5306S19R-G |                             | 60        | 3.0       | 0.59      | 0.3        | 195        |



## SiC Schottky Barrier Diodes

| Product                   | Package                          | V <sub>s</sub> [V] | I <sub>f</sub> [A] | V <sub>r</sub> [V] | I <sub>h</sub> | C <sub>t</sub> [pF] |
|---------------------------|----------------------------------|--------------------|--------------------|--------------------|----------------|---------------------|
| <b>NEW</b> XBSC41A066CS-G | TO-220AC<br>(1,000pcs/20Tubes)   | 650                | 6                  | 1.35               | 0.15μA         | 300                 |
| <b>NEW</b> XBSC42A086CS-G |                                  |                    | 8                  |                    | 0.20μA         | 400                 |
| <b>NEW</b> XBSC43A106CS-G |                                  |                    | 10                 |                    | 0.25μA         | 500                 |
| <b>NEW</b> XBSC41A066FS-G | TO-220FM-2<br>(1,000pcs/20Tubes) | 650                | 6                  | 1.35               | 0.15μA         | 300                 |
| <b>NEW</b> XBSC42A086FS-G |                                  |                    | 8                  |                    | 0.20μA         | 400                 |
| <b>NEW</b> XBSC43A106FS-G |                                  |                    | 10                 |                    | 0.25μA         | 500                 |

### Package



#### SMA-XG

h=2.3 MAX.





#### SOD-123A/P

h=1.25 MAX.





#### SOD-323A/P

h=1.0 MAX.





#### SOD-523A/P

h=0.77 MAX.





#### SOD-723

h=0.65 MAX.




#### SOD-923

h=0.35




#### TO-220AC

h=4.75 MAX.





#### TO-220FM-2

h=4.9 MAX.





#### FBP1006-2A

h=0.55 MAX.



#### SOT-23

h=1.3 MAX.  
p=1.9



# Transient Voltage Suppressor (TVS)

## Zener Diode, Bridge Diode, Switching Diode Lineup


### Transient Voltage Suppressors (TVS)

| Product       | Package                        | Application             | Protected Lines | V <sub>WM</sub> (MAX) [V] | V <sub>WM</sub> (MIN) [V] | C <sub>j</sub> [pF] | Electrostatic discharge voltage (IEC61000-4-2) | Internal circuit |
|---------------|--------------------------------|-------------------------|-----------------|---------------------------|---------------------------|---------------------|------------------------------------------------|------------------|
| XBP1010-G     | SOT-923P<br>(3,000pcs/Reel)    | ESD Protection          | 1               | 5.0                       | 6.2                       | 35                  | Contact : ±8kV                                 |                  |
| XBP1011-G     | SOT-323P<br>(5,000pcs/Reel)    | ESD Protection          | 1               | 5.0                       | 6.0                       | 110                 | Contact : ±25kV                                |                  |
| XBP1013-G     | SOT-323P<br>(5,000pcs/Reel)    | ESD Protection          | 1               | 5.0                       | 6.0                       | 300                 | Contact : ±25kV                                |                  |
| XBP1012-G     |                                | DVI Ethernet USB 2.0    |                 | 12.0                      | 13.3                      | 110                 | Contact : ±8kV                                 |                  |
| XBP1007-G     |                                |                         |                 | 24.0                      | 27.3                      | 3                   | Contact : ±8kV                                 |                  |
| XBP06V0U25R-G | FBP1006-2A<br>(10,000pcs/Reel) | USB3.0                  | 1               | 5.0                       | 6.0                       | 0.35                | Air : ±15kV<br>Contact : ±15kV                 |                  |
| XBP06V0U2MR-G | SOT-23<br>(3,000pcs/Reel)      | USB2.0                  | 2               | 5.0                       | 6.0                       | 0.8                 | Air : ±15kV<br>Contact : ±15kV                 |                  |
| XBP06V4E4GR-G | USP-4<br>(3,000pcs/Reel)       | ESD Protection          | 4               | 5.0                       | 7.2                       | 40                  | Contact : ±30kV                                |                  |
| XBP14ESUFN-G  | DFN2510-10A<br>(5,000pcs/Reel) | DVI USB 3.0 Set-top Box | 4               | 5.0                       | 9.0                       | 0.8                 | Air : ±15kV<br>Contact : ±8kV                  |                  |

### Package



#### SOD-923

h=0.35





#### SOD-523A/P

h=0.77 MAX.




#### SOD-323A/P

h=1.0 MAX.





#### FBP1006-2A

h=0.95 MAX.





#### SOT-23

h=1.3 MAX.  
p=1.9



#### USP-4/USP-4D

h=0.8 MAX.  
p=0.6



#### DFN2510-10A

h=0.45 MAX  
p=0.5





### Zener Diodes

| Product      | Package                     | V <sub>Z</sub> (V) |      |      | ZZT (Ω) | IZT (mA) | ZZK (Ω) | IZK (mA) | IR (μA) |        |
|--------------|-----------------------------|--------------------|------|------|---------|----------|---------|----------|---------|--------|
|              |                             | Min.               | Typ. | Max. |         |          |         |          | Max.    | @VR(V) |
| XBZ02P0751-G | SOD-523P<br>(5,000pcs/Reel) | 7.13               | 7.5  | 7.88 | 15      | 5        | 80      | 1        | 1       | 5      |
| XBZ02P0911-G |                             | 8.65               | 9.1  | 9.65 | 15      |          | 100     |          | 0.5     | 6      |
| XBZ02P1201-G |                             | 11.4               | 12   | 12.6 | 25      |          | 150     |          | 0.1     | 8      |
| XBZ02P3601-G |                             | 34.2               | 36   | 37.8 | 90      |          | 350     |          | 0.1     | 25.2   |

#### SOD-523P

h=0.77 MAX.





### Switching Diodes

| Product      | Package                     | VRM (V) | V <sub>F</sub> (V) |        | I <sub>R</sub> (μA) |        | trr (ns) | CT (pF)    |        |
|--------------|-----------------------------|---------|--------------------|--------|---------------------|--------|----------|------------|--------|
|              |                             |         | Max.               | @IF(A) | Max.                | @VR(V) |          | @VR(V)     | @VR(V) |
| XBW15S400-G  | SOD-523P<br>(5,000pcs/Reel) | 90      | 1.2                | 0.1    | 0.1                 | 80     | 4 (Typ.) | 0.5 (Typ.) | 0      |
| XBW21P0204-G | SOT-323<br>(3,000pcs/Reel)  | 100     | 1.25               | 0.15   | 0.03                | 25     | 4 (Typ.) | 1.5 (Max.) | 0      |



#### SOD-523P

h=0.77 MAX.



#### SOT-323

h=1.1 MAX.



### Bridge Diodes

| Product    | Package                  | VRM (V) | I <sub>o</sub> (A) | IFSM (A) | V <sub>F</sub> (V) |        | I <sub>R</sub> (μA) |
|------------|--------------------------|---------|--------------------|----------|--------------------|--------|---------------------|
|            |                          |         |                    |          | Max.               | @IF(A) | Max.                |
| XBR12A6-G  | SDIP<br>(3,000pcs/2Reel) | 600     | 1.5                | 50       | 1.1                | 1      | 600                 |
| XBR12A8-G  |                          | 800     |                    |          |                    |        | 800                 |
| XBR12A10-G |                          | 1000    |                    |          |                    |        | 1000                |

### SDIP

